


cloud mini pendant plate origin

circular product

cloud mini pendant plate

origin

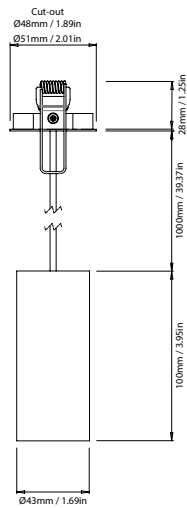


cloud mini pendant plate origin

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

3

The fully repaired and tested product enters back into our stock –with a brand new warranty.

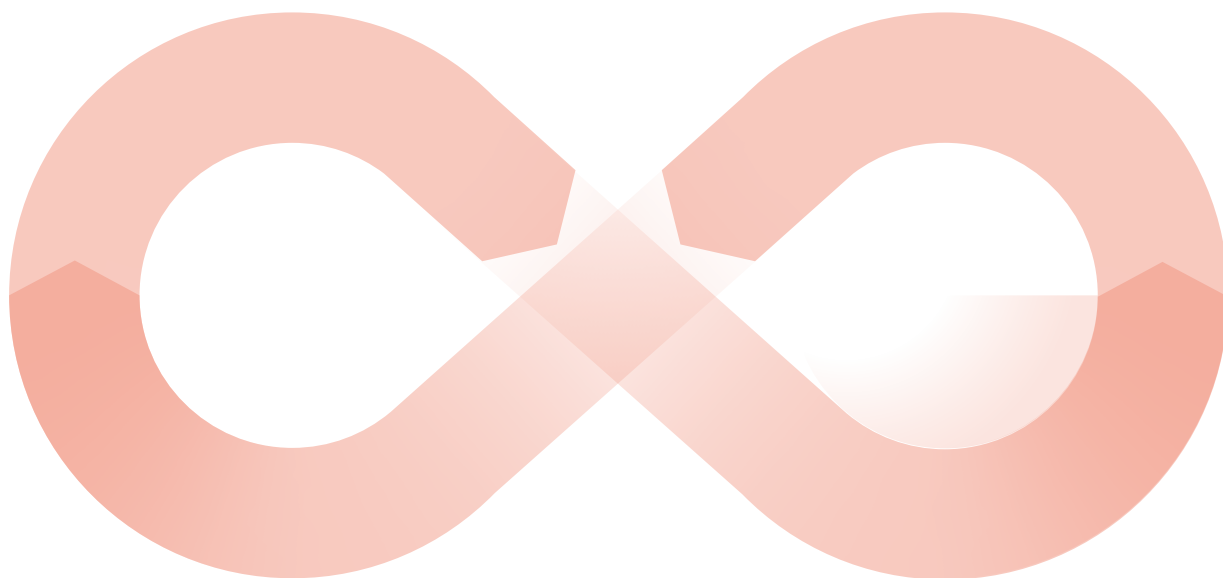

The 'new' light fitting is despatched to a new customer.

4

2

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.



circular product

Orluna



cloud mini pendant plate origin

circular product

		2700K						
		SPOT	SOFT				SPECIALITY	
LIGHT VALUES		Spot	Narrow	Medium	Wide	Flood	Crisp	Linear
	Beam Width FWHM	14°	25°	28°	39°	48°	33°	10x45°
	Initial Lumens	739	1045	1045	1045	1045	1045	739
	Engine Lumens	341	741	812	839	826	837	280
	Luminaire Lumens	229	567	682	679	634	686	190
	Engine Lm/W	50	71	77	80	79	80	41
	Luminaire Cd	3149	1798	2342	1458	989	2056	484
POWER	Voltage	34V	35V				34V	
	Drive Current	200mA	300mA				200mA	
	Circuit Power (typ)	8W	11.8W				8W	

		3000K						
		SPOT	SOFT				SPECIALITY	
LIGHT VALUES		Spot	Narrow	Medium	Wide	Flood	Crisp	Linear
	Beam Width FWHM	14°	25°	28°	39°	49°	33°	10x45°
	Initial Lumens	776	1095	1095	1095	1095	1095	776
	Engine Lumens	357	778	849	883	867	879	295
	Luminaire Lumens	241	594	712	705	665	723	202
	Engine Lm/W	53	74	81	84	83	84	43
	Luminaire Cd	3294	1854	2429	1536	1030	2226	470
POWER	Voltage	34V	35V				34V	
	Drive Current	200mA	300mA				200mA	
	Circuit Power (typ)	8W	11.8W				8W	

Binning SDCM (Hot)	2
CRI (typ)(R9)	98 (99)
TM30 Rf Rg	Rf 93.8 Rg 101.9
Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
Lifetime (Calculated)	L70 426,000hrs
Protocols	Mains Dim / DALI / 0-10V / Non-dim
Dim to Dark	0.1% Lux
Distance from LED	20m / 65' (series wiring)

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
OR	- CMPP -	27	M	M	- W -	BB	54 K
		27 / 2700K 30 / 3000K	M / Mains Dim D / DALI 0 / 0-10V N / Non Dim X / No Driver	S / Spot N / Narrow M / Medium W / Wide F / Flood C / Crisp L / Elliptical Linear	W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL AB / Black Anodised AV / Bronze Anodised V / Dark Bronze T / Medium Bronze R / Light Bronze Y / Burnished Brass G / Polished Brass K / Brushed Chrome L / Polished Chrome Z / Other Metallic	WB / White RAL 9010 DB / White RAL 9003 BB / Black RAL 9005 CB / Other RAL VB / Dark Bronze TB / Medium Bronze RB / Light Bronze YB / Burnished Brass GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic	54 / IP54 C / Constant Torsion Spring H / Honeycomb N / Frosted Lens F- / 60 minute fire rating (hood) K / Click Connector E / Emergency Y5 / 5m cable Y / 10m cable

28/03/24

