


## Technical data

Rated voltage	230V AC
Input voltage range	120 - 277 V AC
Class	1
IP	65
IK	10
Diffuser	Satin-finish PMMA
Bulb cover	No
Source	Built-in LED
Color temperature real output	3000°K warm white
Real light output	2055 lm
Total consumption	26 W
Energy class	C (Source LED)
IRC	>80
SDCM	4
Dimmable	No
Ta	-
Ambient temperature range	-10 ~50°C
UGR	-
ULR	-
Photobiological Risk group	RG2
Fixing kit	Yes
With sensor	No
With IP55 socket	No

[Download the installation manual](#)

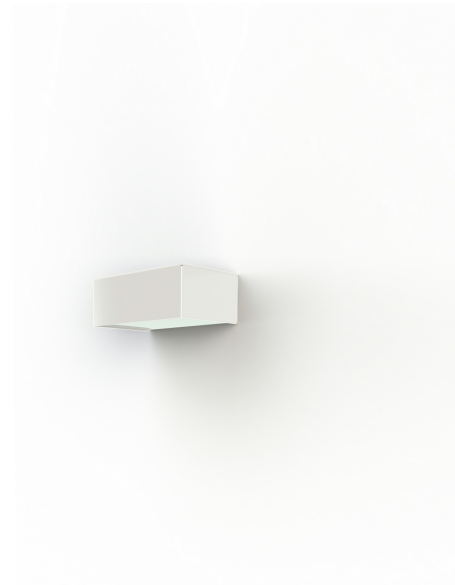

## Materials and finishes

Material	aluminium
Colour	Pure white - 101 - RAL 9010

## Logistic data

Product dimensions	H.105 L.260 P.183
Net weight	2.300 Kg
Gross weight	2.560 Kg
Package dimensions 1	H.340 L.220 P.120

## Certifications and warranties

CE	Pour fiche Média
UL	No
EAC	Yes
RoHS	Yes
ENEC	No
Anti-corrosion	25 years (on Aluminium)
Technical	5 years
Electronics	5 years