




TUBE CHANDELIER, 2006
2024 LOW VOLTAGE UPDATE

Satin Brass
Pendant rod length to order.



OVERALL DIMENSIONS

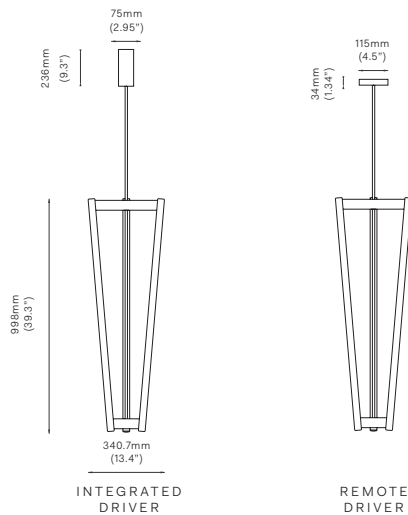

STANDARD MATERIAL/FINISH



MA-TC-SBR
Satin Brass

CUSTOM FINISHES



Plated Nickel



Plated Copper



Custom Patina

CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off and unplugged from mains electricity. Whilst cleaning please be extremely careful and use the gloves provided.

Satin brass: Use the Scotch Brite pad (supplied in the product box) and gently rub the pad in the direction of the grain. Repeat until the natural patina is removed. On rubbing the Scotch Brite to the brass, grains will occur. The colour of the product will temporarily get lighter until it re-oxidises.


Plated Finish: Use a lightly damp soft dust cloth and gently go over marks until clean. Dry it afterwards with a soft dust cloth.

Patinated Finish: Use a dry soft dust cloth and gently go over marks until clean. The brass patina is achieved through an artisanal technique of applying pigments by hand during a hot patination process. Through this alchemic process, the brass is transformed whilst retaining the material's inherent qualities. It will mature and change overtime. The manner and speed in which it will change will depend on the environment, handling and the level and frequency of maintenance. Verdigris can also appear when the copper in the brass begins to oxidise.

Glass tube: Remove the bulb from the product. Using a lightly damp cloth, clean only the outside of the tube and dry it with a dry soft dust cloth. Only put the glass bulb back on the product once it is fully dry.

BACKPLATE DIMENSIONS

Mounting screws not included.
5mm countersunk screw recommended.

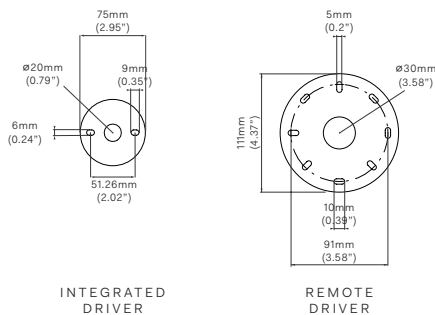

PRODUCT SPECIFICATIONS

Input voltage: 120V / 240V
Maximum wattage: 60W
Dimming protocol: Triac (240v only),
0-10v or DALI
(as specified in the order)
Product weight: 7kg

Integrated LED 24V, 20W, 1500lm / 2350K
IP 20: Indoor Use Only
(suitable for bathroom Zone 3)

Desired pendant rod length to be cut on site at time of installation.

Integrated:
Minimum total drop length 1270mm.
Maximum total drop length 3757mm.

Remote:
Minimum total drop length 1055mm.
Maximum total drop length 3542mm.