

# Tubelight

BCXSY



The Tubelight by BCXSY redefines traditional fluorescent lights and bends the rules of lighting, literally. This suspended design arrives fully assembled, for easy installation. Tubelight is available in two variants, with a 1.5-meter fixed LED tube or 5-meter flexible LED tube. The 1.5-meter version boasts a fixed arc. With the 5-meter version, you can shape the flexible tube as desired. Drape it over the sleek black fixture or fix it to the ceiling or wall with the clamping holders. You can position the tube to your liking. With the dim-to-warm functionality, you enjoy complete control over colour temperature and light intensity for your desired ambiance.

---

## *Detailing*



Illuminate any space with the versatile Tubelight—perfect for offices, homes, and commercial settings.

---


## *Colours*



Tubelight

# Tubelight / 150

## Dimensions

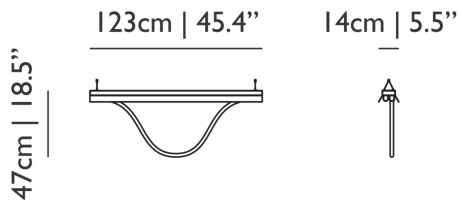

## Product

**WIDTH** 123cm | 48.4"  
**HEIGHT** 47cm | 18.5"  
**DEPTH** 15cm | 5.9"  
**WEIGHT NETTO** 6.7kg | 14.77lbs

## Packaging

**WIDTH** 36cm | 14.2"  
**HEIGHT** 21cm | 8.3"  
**CUBAGE** 0.11m<sup>3</sup> | 4ft<sup>3</sup>  
**LENGTH** 150cm | 59.1"  
**WEIGHT** 11kg | 24.25lbs

## Technical CE

### ADDITIONAL

Complimentary Wireless Wall Switch

### MATERIAL

Powdercoated metal base with silicone LED tubes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

2

### INPUT VOLTAGE

220-240V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

33W

### LIFETIME

50000 hours

### CABLE COLOUR

Black

### CABLE LENGTH

250cm | 98.4"

### SWITCH

No

### CANOPY

Matching steel cylinder

### CHROM X

0.326123

### CHROM Y

0.337708

### COLOUR TEMPERATURE

2900 K (min) / 5800 K (max)

### CRI

94

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

1416 lm

### R9

81

**DIMMING & LIGHTING CONTROL**

Wireless Wall Switch (dimmer), Mains / ELV dimming is not possible, Dim to Warm

*See last page for more information about the dimming possibilities.*



---

*Technical UL***ADDITIONAL**

Complimentary Wireless Wall Switch

**MATERIAL**

Powdercoated metal base with silicone LED tubes

**LIGHTSOURCE TYPE**

LED

**LIGHTSOURCE INCLUDED**

Yes

**NUMBER OF LIGHTSOURCES**

2

**INPUT VOLTAGE**

120-277V

**FREQUENCY**

50/60

**MAX POWER CONSUMPTION**

33W

**LIFETIME**

50000 hours

**CABLE COLOUR**

Black

**CABLE LENGTH**

250cm | 98.4"

**SWITCH**

No

**CANOPY**

Matching steel cylinder

**CHROM X**

0.326123

**CHROM Y**

0.337708

**COLOUR TEMPERATURE**

2900 K (min) / 5800 K (max)

**CRI**

94

**LIGHT DIRECTION**

All directions

**LIGHT OUTPUT**

1416 lm

**R9**

81

**DIMMING & LIGHTING CONTROL**


Wireless Wall Switch (dimmer), Mains / ELV dimming is not possible, Dim to Warm

*See last page for more information about the dimming possibilities.*



# Tubelight / 500

## Dimensions

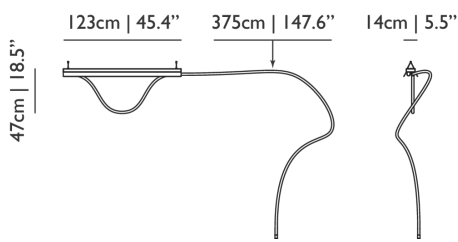

## Product

**WIDTH** 123cm | 48.4"  
**HEIGHT** 8cm | 3.1"  
**DEPTH** 15cm | 5.9"  
**WEIGHT NETTO** 8.5kg | 18.74lbs

## Packaging

**WIDTH** 38.5cm | 15.2"  
**HEIGHT** 23cm | 9.1"  
**CUBAGE** 0.13m<sup>3</sup> | 4.69ft<sup>3</sup>  
**LENGTH** 150cm | 59.1"  
**WEIGHT** 13.5kg | 29.76lbs

## Technical CE

### ADDITIONAL

Complimentary Wireless Wall Switch

### MATERIAL

Powdercoated metal base with silicone LED tubes

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

2

### INPUT VOLTAGE

220-240V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

65W

### LIFETIME

50000 hours

### CABLE COLOUR

Black

### CABLE LENGTH

250cm | 98.4"

### SWITCH

No

### CANOPY

Matching steel cylinder

### CHROM X

0.326123

### CHROM Y

0.337708

### COLOUR TEMPERATURE

2900 K (min) / 5800 K (max)

### CRI

94

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

3636 lm

R9

81

**DIMMING & LIGHTING CONTROL**

Wireless Wall Switch (dimmer), Mains / ELV dimming is not possible, Dim to Warm

*See last page for more information about the dimming possibilities.*



---

*Technical UL*

**ADDITIONAL**

Complimentary Wireless Wall Switch

**MATERIAL**

Powdercoated metal base with silicone LED tubes

**INSTALLATION REQUIRED**

Yes

**LIGHTSOURCE TYPE**

LED

**LIGHTSOURCE INCLUDED**

Yes

**NUMBER OF LIGHTSOURCES**

2

**INPUT VOLTAGE**

120/277V

**FREQUENCY**

50/60

**MAX POWER CONSUMPTION**

65W

**LIFETIME**

50000 hours

**CABLE COLOUR**

Black

**CABLE LENGTH**

250cm | 98.4"

**SWITCH**

No

**CANOPY**

Matching steel cylinder

**CHROM X**

0.326123

**CHROM Y**

0.337708

**COLOUR TEMPERATURE**

2900 K (min) / 5800 K (max)

**CRI**

94

**LIGHT DIRECTION**

All directions

**LIGHT OUTPUT**

3636 lm

R9

81

**DIMMING & LIGHTING CONTROL**

Wireless Wall Switch (dimmer), Mains / ELV dimming is not possible, Dim to Warm

*See last page for more information about the dimming possibilities.*



## *Dimming & Lighting Control*

### *Wireless Wall Switch (dimmer)*

With our Wireless Wall Switch, you'll have full control over your Moooi lighting design with one touch. Our Wireless Wall Switch comprises two components, a wall switch and radio device to put in the canopy of your Moooi lighting design. The wall switch can be integrated in System 55 or Decora style wall switches. The Wireless Wall Switch communicates via Bluetooth with the radio device in the luminaires canopy. Within moments you can enjoy full and fluent dimming, all the way to dark.

Compatible models: 150 CCC, 150 CE, 150 UL, 500 CCC, 500 CE, 500 UL

---

### *Mains / ELV dimming is not possible*

Mains and/or ELV dimming is not possible. The wireless wall switch is advised for dimming in this case.

Compatible models: 150 CCC, 150 CE, 150 UL, 500 CCC, 500 CE, 500 UL

---

### *Dim to Warm*

3000k - 2100k Dim to Warm

Compatible models: 150 CCC, 150 CE, 150 UL, 500 CCC, 500 CE, 500 UL

---