CIRCA TABLE

DESCRIPTION
Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE
Table

LIGHT SOURCE
LED Flat-Panel

LIGHT CONTROL
Full range dim control 100%-10% (optical switch)

FEATURES
360° shade rotation
45° shade tilt in two directions
USB-A charging port
Ships flat-packed

SPECIFICATIONS
Voltage: 120V or 240V 50-60Hz
Power Consumption: 8.7W
Color temperature: 2700K
Luminosity: 500 Lumens
Luminaire efficacy: 57 Lumens/Watt
Color Rendition Index: 90 CRI
ADA compliant
Title 20 compliant
50K hour lifespan
Cable length: 8' (244cm)
Global multi-plug adapter available

CERTIFICATIONS

FINISHES

WHITE GRAPHITE

DIMENSIONS

CIRCA TABLE

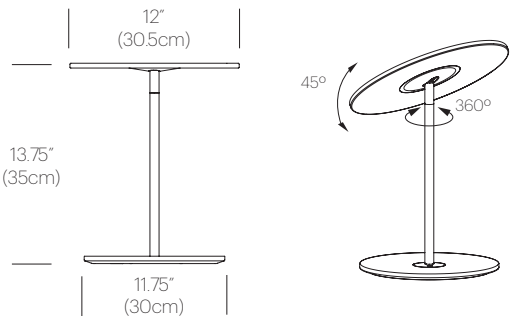

CIRCA GROMMMET



SURFACE MOUNT AVAILABLE FOR 1.18" (3cm), 2" (5cm) AND 3" (7.5cm) WORKSURFACES

PRODUCT CODES

Circa Table (Graphite):	CIRC TBL GPT
Circa Table (White):	CIRC TBL WHT
Circa Table Grommet (White):	CIRC-GROM-WHT
Circa Table Grommet (Graphite):	CIRC-GROM-GPT

PACKAGING WEIGHT AND DIMENSIONS

Circa Table :	8.45LBS	15'' X 14'' X 4''
	3.8KGS	38cm X 36cm X 10cm

NOTES
Custom requests can be considered on volume orders

AVAILABLE GLOBALLY

CIRCA FLOOR

DESCRIPTION
Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE
Floor

LIGHT SOURCE
LED Flat-Panel

LIGHT CONTROL
Full range dim control 100%-10% (optical switch)

FEATURES
360° shade rotation
45° shade tilt in two directions
USB-A charging port
Ships flat-packed

SPECIFICATIONS
Voltage: 120V or 240V 50-60Hz
Power Consumption: 11.5W
Color temperature: 2700K
Luminosity: 800 Lumens
Luminaire efficacy: 70 Lumens/Watt
Color Rendition Index: 90 CRI
ADA compliant
Title 20 compliant
50K hour lifespan
Cable length: 8' (244cm)
Global multi-plug adapter available

CERTIFICATIONS

FINISHES

WHITE

GRAPHITE

DIMENSIONS

CIRCA FLOOR

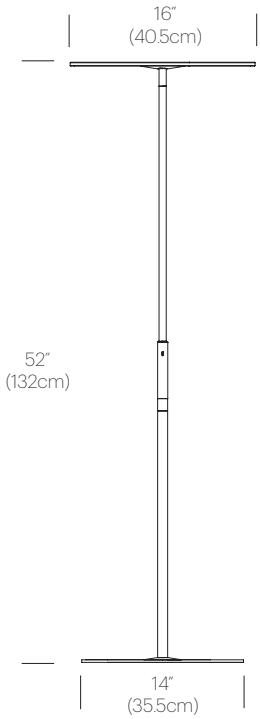

PRODUCT CODES

Circa Floor (Graphite):	CIRC FLR GPT
Circa Floor (White):	CIRC FLR WHT

PACKAGING WEIGHT AND DIMENSIONS

Circa Floor:	21.9LBS	29" X 18" X 3.5"
	9.9KGS	74cm X 46cm X 9cm

NOTES
Custom requests can be considered on volume orders

AVAILABLE GLOBALLY

CIRCA PENDANT

DESCRIPTION
Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE
Pendant

LIGHT SOURCE
LED Flat-Panel

LIGHT CONTROL
Hard wired, dimmable
Compatible with TRIAC and ELV dimmers
0-10V dimming available upon request
Dali compatability upon request

FEATURES
360° shade rotation
45° shade tilt in two directions
Ships flat-packed

SPECIFICATIONS
Voltage: 120 or 240V 50-60Hz
Power Consumption: 10.5W
Color temperature: 2700K
Luminosity: 12"(555Lm), 16"(740 Lm)
Luminaire efficacy: 53 Lumens/Watt (12),
70 Lumens/Watt (16)
Color Rendition Index: 90 CRI
Title 20 compliant
50K hour lifespan
Cable length: 10' (305cm) (Field Cuttable)

CERTIFICATIONS

FINISHES

WHITE GRAPHITE

DIMENSIONS

CIRCA PENDANT 12

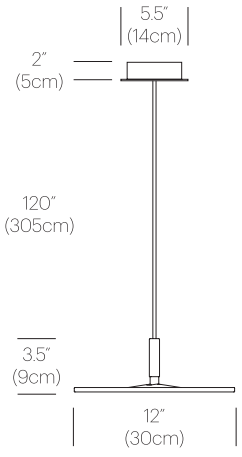

CIRCA PENDANT 16

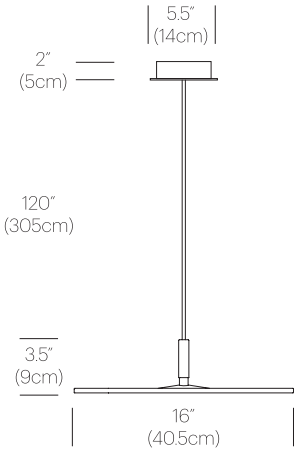

PRODUCT CODES

Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT

PACKAGING WEIGHT AND DIMENSIONS

Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

NOTES
Custom requests can be considered on volume orders

AVAILABLE GLOBALLY

CIRCA FLUSH

DESCRIPTION
Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE
Wall/Ceiling

LIGHT SOURCE
LED Flat-Panel

LIGHT CONTROL
Hard wired, dimmable
Compatible with TRIAC and ELV dimmers
0-10V dimming available upon request
Dali compatability upon request

FEATURES
Ships flat-packed

SPECIFICATIONS
Voltage: 120 or 240V 50/60Hz
277V 50/60Hz available upon request
Power Consumption: 10.5W
Color temperature: 2700K
Luminosity: 12"(555Lm), 16"(740 Lm)
Luminaire efficacy: 53 Lumens/Watt (12),
70 Lumens/Watt (16)
Color Rendition Index: 90 CRI
Title 20 compliant
ADA compliant
50K hour lifespan

CERTIFICATIONS

12" STOCK ITEM

16" STOCK ITEM

DIRECT

INDIRECT
SPECIAL ORDER ONLY

FINISHES

WHITE

GRAPHITE

DIMENSIONS

CIRCA FLUSH 12

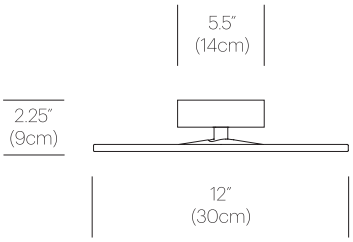

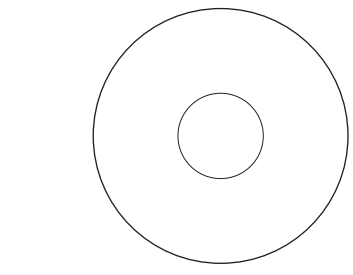

CIRCA FLUSH 16

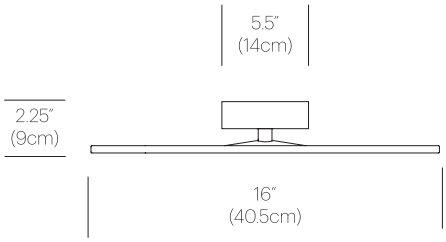

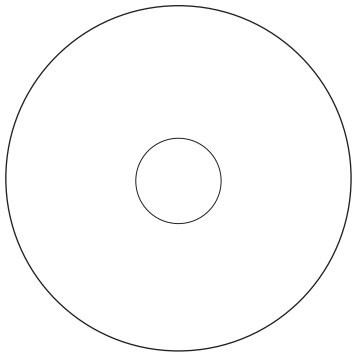

PRODUCT CODES

Circa Flush Direct 12 Graphite:	Special order only
Circa Flush Direct 12 White:	CIRC FSH 12 WHT
Circa Flush Direct 16 Graphite:	Special order only
Circa Flush Direct 16 White:	CIRC FSH 16 WHT
Circa Flush Indirect 12 Graphite:	Special order only
Circa Flush Indirect 12 White:	Special order only
Circa Flush Indirect 16 Graphite:	Special order only
Circa Flush Indirect 16 White:	Special order only

PACKAGING WEIGHT AND DIMENSIONS

Circa Flush 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Flush 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

NOTES
Custom requests can be considered on volume orders

AVAILABLE GLOBALLY

CIRCA CHANDELIER

DESCRIPTION
Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa Chandelier is available in 3, 5, and 7 lamp configurations to fit a wide range of commercial and residential environments.

FIXTURE TYPE
Pendant

LIGHT SOURCE
LED Flat-Panel

LIGHT CONTROL
Hard wired, dimmable
Compatible with TRIAC and ELV dimmers
0-10V dimming available upon request
Dali compatability upon request

FEATURES
360° shade rotation
45° shade tilt in two directions
Ships flat-packed

SPECIFICATIONS
Voltage: 120 or 240V 50-60Hz
Power Consumption: 10.5W per lamp
Color temperature: 2700K
Luminosity: 12"(550Lm), 16"(740 Lm) per lamp
Luminaire efficacy: 53 Lumens/Watt (12),
70 Lumens/Watt (16)
Color Rendition Index: 90 CRI
Title 20 compliant
50K hour lifespan
Cable length: 10' (305cm) (Field Cuttable)

CERTIFICATIONS
Intertek CE

FINISHES
LAMP
WHITE GRAPHITE

CANOPY
WHITE

DIMENSIONS
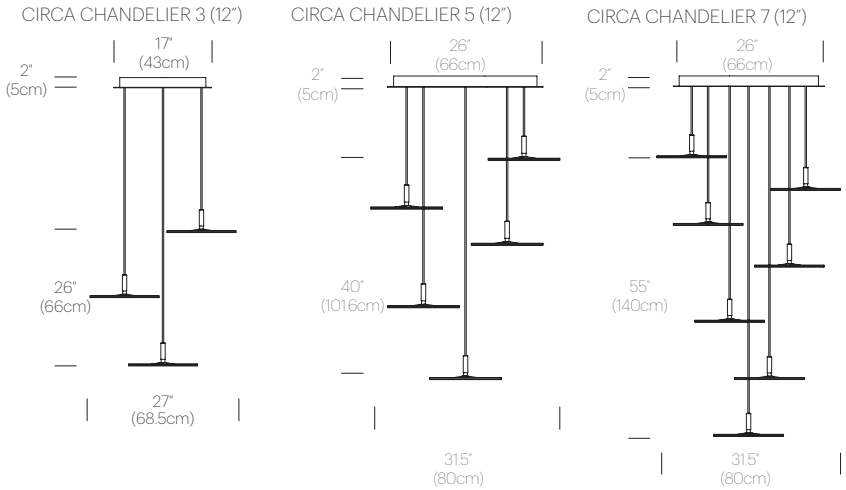

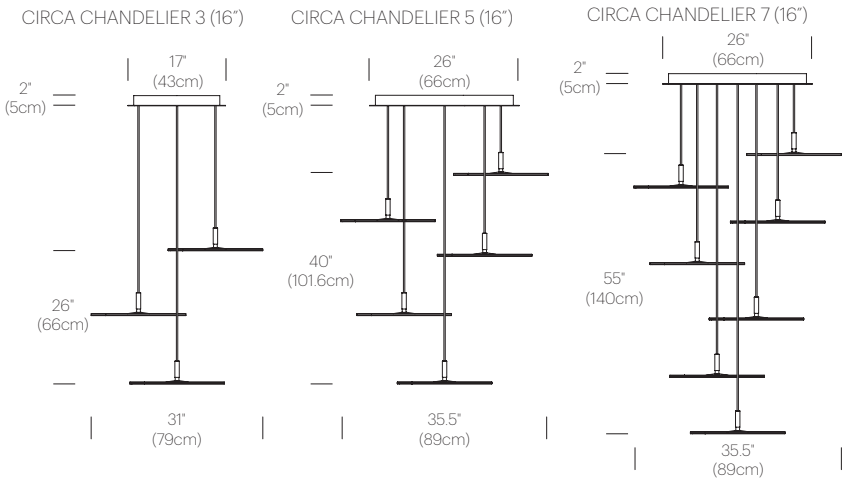

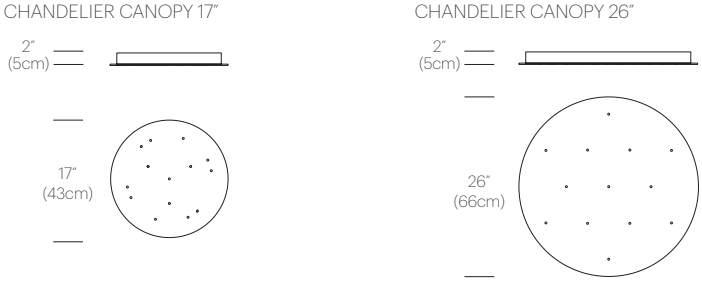

PRODUCT CODES

Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT
17" Chandelier Canopy:	CHND CAN 17
26" Chandelier Canopy:	CHND CAN 26

PACKAGING WEIGHT AND DIMENSIONS

Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm
Chandelier canopy 17":	15LBS	22" X 22" X 6"
	6.8KGS	56cm X 56cm X 15cm
Chandelier canopy 26":	30LBS	32" X 32" X 6"
	13.6KGS	81cm X 81cm X 15cm

NOTES
Custom requests can be considered on volume orders

AVAILABLE GLOBALLY