SUPERLIGHT TABLE

DESCRIPTION

Superlight balances the demands of both workplace and home with a combination of minimal form and maximal function. Superlight is a task light reduced to its essence. A gestural line in space resulting in a precise yet playful structure defying gravity with an appearance of near weightlessness. Superlight achieves fluid, sweeping movement in every direction with a full 3-axis range of motion providing warm, glare-free LED light exactly where you need it. Superlight is available as a desk, floor, wall, clamp or grommet mounted fixture.

FIXTURE TYPE

Table

LIGHT SOURCE

High-output LED array

LIGHT CONTROL

Full range dim control

FEATURES

3-axis rotation at each joint Ultra-light minimal frame 4 colored base pads Advanced LED array eliminates multiple shadows Ships flat-packed

SPECIFICATIONS

Voltage: 120-240V 50-60Hz Power consumption: 8.5W Color temperature: 3000K Luminosity: 700 Lumens Luminaire efficacy: 81 Lumens/watt Color rendition index: 90+ CRI 50K hour lifespan Cable length: 9' (274cm) Global multi-plug adapter available Title 20 compliant Patent pending




FINISHES



DIMENSIONS

SUPERLIGHT TABLE

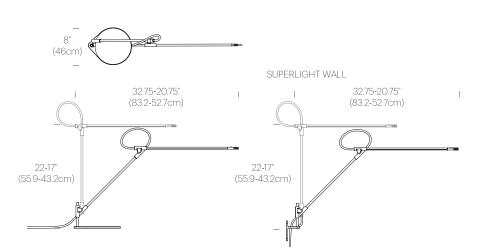

PRODUCT CODES

Superlight Table (White):	SUPE TBL WHT
Superlight Table (Black):	SUPE TBL BLK
Superlight Clamp (White):	SUPE CLP WHT
Superlight Clamp (Black):	SUPE CLP BLK
Superlight Grommet (White):	SUPE GROM WHT
Superlight Grommet (Black)	SUPE GROM BLK
Superlight Wall (White):	SUPE WALL WHT
Superlight Wall (Black):	SUPE WALL BLK

PACKAGING WEIGHT AND DIMENSIONS


Superlight Table:	8.3LBS	28" X 9" X 3.5"
	3.7KGS	71cm X 23cm X 9cm

NOTES

Custom requests can be considered on volume orders

214 **Pablo**

AVAILABLE GLOBALLY

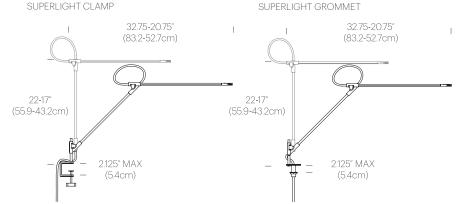

SUPERLIGHT FLOOR

DESCRIPTION

Superlight balances the demands of both workplace and home with a combination of minimal form and maximal function. Superlight is a task light reduced to its essence. A gestural line in space resulting in a precise yet playful structure defying gravity with an appearance of near weightlessness. Superlight achieves fluid, sweeping movement in every direction with a full 3-axis range of motion providing warm, glare-free LED light exactly where you need it. Superlight is available as a desk, floor, wall, clamp or grommet mounted fixture.

FIXTURE TYPE

Floor

LIGHT SOURCE High-output LED array

LIGHT CONTROL Full range dim control

FEATURES

3-axis rotation at each joint Ultra-light minimal frame Felt base pad Advanced LED array eliminates multiple shadows Ships flat-packed

SPECIFICATIONS

CERTIFICATIONS CE

PRODUCT CODES

Superlight Floor (White) Superlight Floor (Black)

Superlight Floor:

NOTES

Voltage: 120-240V 50-60Hz Power consumption: 8.5W Color temperature: 3000K Luminosity: 700 Lumens Luminaire efficacy: 81 Lumens/watt Color rendition index: 90+ CRI 50K hour lifespan Cable length: 9' (274cm) Global multi-plug adapter available Title 20 compliant Patent pending



FINISHES





DIMENSIONS

SUPERLIGHT FLOOR

