# MICHAELANASTASSIADES

### INSTALLATION INSTRUCTIONS



TIP OF THE TONGUE CEILING & WALL MOUNTED, 2015

#### PRODUCT SPECIFICATIONS

Bulb specifications 120V / 240V G9 maximum wattage 40W 120V/ 240V dimmable LED triac Product weight: ~3.5kg

#### BEFORE INSTALLING

Please keep these instructions for future reference

Please read instructions in full prior to installation noting all illustrations. Instructions should be followed precisely.

Always wear the gloves provided when handling the fixture.

If you are in any doubt, consult a qualified electrician to install the fitting.

Install in accordance with current national or local wiring regulations.

Ensure the circuit, to which the fitting is to be connected, has been installed and fused in accordance with local electrical standards.

Disconnect the electrical supply at the fuse box. Switching off via a wall switch is not adequate.

Ensure that only the correct types of bulbs are fitted. Before changing light bulbs, always switch off the mains power and allow the lamp to cool.

The fitting is for use in a normal dry domestic indoor environment. Suitable for mounting on non-combustible surfaces only.

If removing an existing fitting, carefully note all wiring connections and record which of the wires is connected to which terminal.

Carefully identify the supply cable. Check there are no other cables in the area to avoid damage to concealed wiring during installation.

Please make sure the wires are matching to the correct connectors according to live, neutral or earth (ground).

Position the light where desired, ensuring that the area is suitable to support the weight of the light.

Determine the fixing method appropriate to the surface material.

Modifying any part of the light will void the products warranty.

Michael Anastassiades accepts no liability for incorrect use of the mentioned object.

#### CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off and unplugged from mains electricity. Whilst cleaning please take care and use the gloves provided.


Polished brass: As the item is unlacquered it will naturally oxidise and darken. Upon touching the items without gloves, fingerprints are likely to occur and leave marks. Use a good quality brass cleaning liquid and follow the product instructions using the extra soft dust cloth. Do not apply pressure on persistent marks. Remove them using repeated gentle motions and by reapplying the brass cleaning liquid.

Polished nickel: Use a lightly damp soft dust cloth and gently go over marks until clean. Dry it afterwards with a soft dust cloth. Make sure the product is completely dry before switching the electricity on.

Black patinated: Use a dry soft dust cloth and gently go over marks until clean.

Opaline Glass: Remove the glass diffuser from the product. Using a lightly damp cloth, clean only the outside of the sphere. Only put the glass sphere back on the product once it is fully dry.

# Parts Supplied



### Additional Items Provided

Pair of Gloves Spare Kit Bag

# Additional Requirements

Power Drill and bits Mounting Screws and Ceiling Anchors

Fig. 1

Whilst installing the fixture please take care and use the gloves provided.






Fig. 2

Use the allen key (A) to unscrew the grub screw (B) so that the lamp body (C) can be removed from the mounting plate (D).






### Fig. 3 For 240V Fittings

Position the mounting plate (D) onto ceiling by passing the mains electrical supply cables through the hole. Mark the two holes to be drilled and remove the mounting plate. Drill and insert ceiling anchors into place, ensuring that the area is suitable to support the entire weight of the fixture. Screw the mounting plate onto the ceiling, making sure it is levelled and even.

Please note: Ceiling anchors and mounting screws not supplied for this fixture, determine the fixing method appropriate for your ceiling before starting.

Go to Fig. 5 for next step.



# Fig. 4 For 120V fittings

Screw the mounting plate (D) onto the junction box (E), making sure that it is levelled and even. Pass the mains electrical supply cables through the hole.

Please note: Mounting screws not supplied for this fixture.





Fig. 5

Connect the live, neutral and earth of the mains electrical cable to the terminal block of the fixture. Make sure all electrical cables match correctly.

See Cable Connection Guide for further reference.





FRONT VIEW


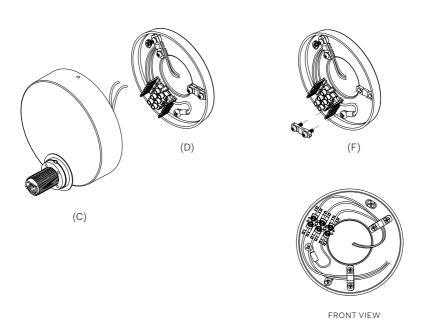


Fig. 6

Bring the fixturelamp body (C) close to the mounting plate (D) and connect the live, neutral and earth to the terminal block. Make sure all electrical cables match correctly.

See Cable Connection Guide for further reference.

Use the cordgrip (F) to secure the wires.






Fig. 7

Use the allen key (A) to screw the grub screw (B) so that the lamp body (C) can be secured with the mounting plate (D).




Fig. 8
Insert the G9 bulb supplied into the bulb holder (G).





Fig. 9

Carefully screw the opaline glass onto the bulb holder (G).



Michael Anastassiades' design philosophy is to preserve the inherent qualities of given materials. All of our products are handmade and come in natural finishes, exposed to the elements without any protective lacquers. We look at oxidisation as part of a process that adds to the patina of an object, increasing beauty with time. We try our best for all goods to leave our premises in pristine condition, but sometimes products may arrive with minor oxidisation marks.

Whilst every effort is made to ensure an accurate representation of product colours, finishes and dimensions, Michael Anastassiades Ltd reserves the right to alter these details without notice, in compliance with its own production needs, technological changes or in response to the current market needs. Colour swatches are for reference only; Michael Anastassiades Ltd cannot guarantee exact colour match for any product finishes.

All designs are protected under copyright law. Michael Anastassiades holds the exclusive manufacturing and distribution rights worldwide. Copying will be prosecuted.

All light fixtures in this catalogue have CE marking compliance.

Michael Anastassiades Ltd.
50 Rochester Place, London NW1 9JX
T +44 (0)20 7928 7527
sales@michaelanastassiades.com
www.michaelanastassiades.com
© 2020 Michael Anastassiades Ltd. All rights reserved.